




CLIPSICO PACK | Packaging Solutions



STRETCH FILM

CLIPSICOPACK offers Wide Range of HIGH PERFORMANCE STRETCH WRAP

Automatic

Hand Grade

Physical Roll PROPERTIES

Roll Weight

Kg

10 to 50

1 to 5

Roll Width

mm

350 / 500 / 1000

350/500

Inner Core Dia.

mm

76.6


50

Inner Core weight

kg

1 to 2

0.2 to 1

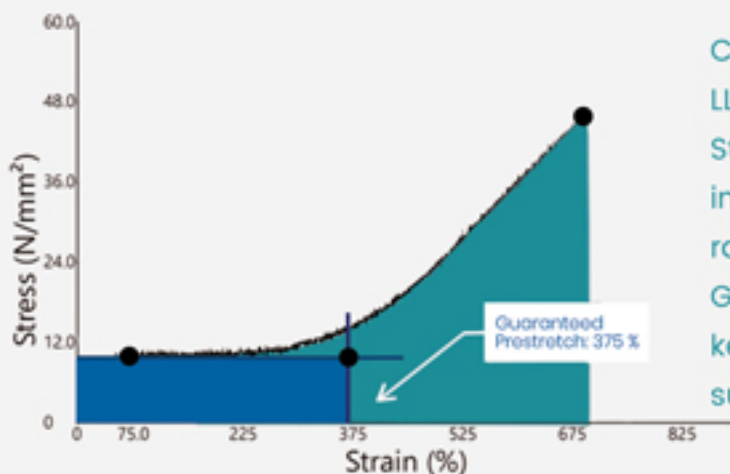

CP offers a wide range of 7 layers Technology LLDPE Stretch Film appropriate for Power , Standard and Handgrade use, Also available in Standard and Jumbo rolls. The Film Gauge ranges from 11mic up to 40mic with Guaranteed Stretchability up to 400% keeping the performance of the wrap at superior level.

Stretch Film Technical Specifications

Max Guaranteed Prestretch%	STANDARD		POWER		POWER PLUS+	
	Stretchability (%)	Puncture (N)	Stretchability (%)	Puncture (N)	Stretchability (%)	Puncture (N)
12 μm			200%	16	250%	18
15 μm			220%	17	270%	20
17 μm	180%	16	250%	18	300%	22
23 μm	180%	17	260%	20	330%	28
30 μm	180%	20	300%	26	375%	35

SAVING TABLE

	Nominal Weight	STANDARD		POWER		POWER PLUS+	
		g/meter	g/meter	g/meter	g/meter	g/meter	g/meter
12 μm	5.7			2.9	2.3		
15 μm	7			3.2	2.6		
17 μm	8	4.4		3.2	2.7		
23 μm	11	6.1		4.1	3.3		
30 μm	14	7.8		4.7	3.7		